


COEX™ C2000 Thermal IP Fixed Camera Station with Integrated Junction Box

The COEX™ C2000 Thermal IP Fixed Camera Station with integrated junction box has a unique compact and lightweight design developed specifically to meet the worldwide demand for surveillance and process monitoring of harsh industrial and marine environments, while allowing constant visual feedback in zero-light conditions.

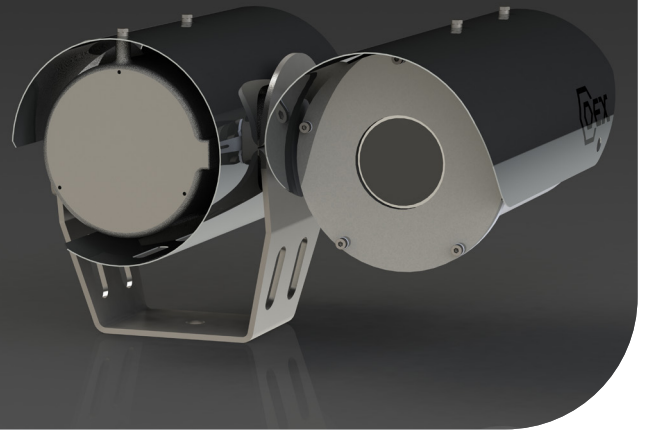

The COEX C2000 marine camera stations are manufactured from the highest-grade, corrosion-resistant, electro-polished 316L stainless steel. They are designed for toughness and durability to operate in the most adverse environments, from freezing temperatures to the blistering heat of desert conditions.

This premium-performance camera station delivers superb thermal imaging in all lighting conditions and across long distances.

Featuring the latest encoding technology (3rd generation IP encoder), the camera station is capable of triple-stream H.264 and H.265 encoding for simultaneous live view and recording.

Utilizing the advanced radiometry feature, the camera station can provide real-time temperature data and differential temperature monitoring of critical devices and applications.

The C2000 Thermal IP Fixed Camera Station has cybersecurity measures built-in, including encrypted video streaming, HTTPS, and 802.1x protocols.

Providing the capability for the direct entry and termination of field cables, the self-contained junction box also accommodates the management of fiber optic cores, power supply, and optional media converters for signal transmission.

This camera station is a versatile option for pre-existing systems, ensures a straightforward installation process, and is compatible with a variety of VMS platforms through ONVIF Profile S and T compliance.

Options

- Advanced radiometry

316L STAINLESS STEEL	H.264 H.265	IP66/IP67
ONVIF S T	-45°C/+60°C	Direct Ethernet
CYBERSECURITY	THERMAL SENSOR	RADIOMETRICS
Triple Streaming		

Specifications

CERTIFICATIONS / RATINGS ¹		[OPTIONS]
EMC	EN61000-6-2, EN61000-6-4 Class A limits	
CE / UKCA	IEC62368-1	
DNV	Pending	

ENVIRONMENTAL	
Operating Temperature	-45°C to +60°C [+70°C] / -49°F to +140°F [+158°F]
Storage Temperature	-45°C to +80°C / -49°F to +176°F
Ingress Protection	IP66 & IP67 to IEC60529 Type 6 Enclosure
Salt Mist	IEC60068-2-52 & IEC60945 Section 8.12
Vibration	0.7 g to IEC60068-2-6 & IEC60945
Wind Loading	Operational to 130 km/h, survival to 268 km/h
Humidity	5% to 95%

MECHANICAL	
Material	Electro-polished 316L stainless steel
Window	Germanium window with DLC (Diamond-Like Carbon) coating
Mounting Orientation	Upright or inverted
Mounting Base	1 x Ø 10.5 mm / 0.41" fixing hole
Dimensions ^{*1} (W x D x H)	353 mm x 310 mm x 219 mm / 13.90" x 12.21" x 8.62
Weight ^{*1}	14 kg / 31 lbs approx.
Cable Gland Entries	1 x M20

ELECTRICAL	Integrated PSU	(Without Integrated PSU)
Input Power Options	(100 to 240) V AC 50/60 Hz	24 V AC/DC (±10%) 50/60 Hz
Power Rating	1.5 A max @ 100 V (Inrush 30 A max)	-
Power Consumption ^{*1}	40 VA Quiescent 50 VA Operating (with heater) 115 VA Max	9 VA Quiescent 14 VA Operating 22 VA Operating (with heater) 27 VA Max
Wash Control ^{*1}	24 V AC/DC (0.75 A max) switched output	
Auxiliary Inputs ^{*3}	1 x contact closure input (5 V pull up) [additional inputs available on request]	
Relay Outputs ^{*3}	1 x volt free switched output (24 V 0.75 A max) [up to 2 available on request]	
Audio ^{*3}	[Line Input]	

CAMERA OPERATION	
Preset Memory	128 user programmable preset positions (digital zoom)
ONVIF Control Features	Digital zoom control, preset store/recall, alarm inputs, and relay outputs

THERMAL IMAGER	T306	T318	T618	T636
Image Sensor	Uncooled LWIR VOx microbolometer			
Pixel Pitch	12 µm			
Thermal Sensitivity	<50 mK at f/1.0			
Spectral Response	8 - 14 µm			
Refresh Rate	>9Hz [>60Hz] [25 Hz / 30 Hz]			
Pixel Resolution	320 x 256			640 x 512
Fixed Focal Length	6.3 mm f/1.0	18 mm f/1.0	18 mm f/1.0	36 mm f/1.0
Angle of View	34.1° x 27.3°	12.7° x 9.7°	24.3° x 19.5°	12.2° x 9.8°
Radiometric Functionality	Yes	No	Yes	No
Features	8x digital zoom, auto/manual gain mode (AGC), auto/manual FFC (NUC), selectable color palettes, second generation digital detail enhancement (DDE), image optimization, active contrast enhancement (ACE), information based histogram equalization (IBHEQ)			
Advanced Radiometry	When used with Synergy, the advanced radiometry feature provides four regions of interest per preset position that can be individually monitored or compared against one another for temperature threshold changes.			

VIDEO ENCODING

Compression Standards	H.264 (MPEG4 part 10/AVC) high, main, base profiles H.265 (MPEG-H part 2/HEVC), MJPEG
Bitrate Mode	Constant Bitrate (CBR), Variable Bitrate (VBR)
Encoding Capability	Up to 3 independently configurable encoded video streams
Stream Bitrate ^{*4}	100 kb/s to 25 Mb/s
Image Resolution ^{*4}	Native (640x512 or 320x256), D1 (720 x 576/480), VGA (640 x 480), QVGA (320 x 240)
Image Rate ^{*4}	Full, half, quarter, sixth
GOP Structure	I-frame only, 5 to 240 frames
Text Overlay	Multi-color, variable font size overlays per encoded video stream
Region of Interest (ROI)	Configurable per encoded video stream, ability to crop a selected area of the image source for encoding (variable resolution and aspect ratio)

AUDIO ENCODING

Compression Standards	ARM AACLC, ARM AACLC MPEG2, ARM AACHE, ARM AACHE V2
Sample Rate	48 kHz, 44.1 kHz, 32 kHz, 16 kHz
Stream Bitrate	12 to 384 kb/s (AACHE and AACHE V2 32 to 64 kb/s)

NETWORK

Interface Options ^{*3}	Ethernet (100Base-T, 10-Base-T), Auto/full/half duplex, Auto/10/100, Configurable MTU Size
Protocols	TCP/IP, UDP, ICMP, DHCP, DNS, HTTP, HTTPS, NTP, RTSP/RTP/RTCP, TSRTTP, RTMP, RTMPS, SRT, IGMP, SNMP, SYNS, SSL, TLS, 802.1x (EAP)
Control Protocol	SYNS, ONVIF (Profile S, T compliant)
Video Stream Delivery	RTSP/RTP (Unicast: UDP/TCP, Multicast UDP), TSRTTP, RTMP, RTMPS, SRT
Network Discovery	SYNS, WS-Discovery (ONVIF)
Device Security	Multiple users and 7 access levels protecting access to the web interface, ONVIF and RTSP services, HTTPS support, HTTP disable, 802.1x (EAP), video streaming disabled until change of default password, unicast stream disable
Supported Internet Browsers	Chrome/Firefox/IE/Edge (No Active-X browser components required)
System Maintenance	Field upgradeable firmware, diagnostic logs Hardware system supervisor providing temperature management, cold-start, auto-shutdown and watchdog control

[FIBER OPTICS]^{*3}	100FxLP	100Fx/20km	100Fx/30km	100WLFxA	1000Lx	1000WLxA
Optical Interface	100Base-Fx	100Base-Fx	100Base-Fx	100Base-Fx	1000Base-Lx	1000Base-Lx
Fibers Required	Dual	Dual	Dual	Single	Dual	Single
Wavelength	1310 nm	1310 nm	1310nm	Tx 1310 nm Rx 1550 nm	1310 nm	Tx 1310 nm Rx 1550 nm
Transmit Optical Power	(-20 to -10) dBm	(-15 to -8) dBm	(-5 to 0) dBm	(-14 to -8) dBm	(-9 to -3) dBm	(-9 to -3) dBm
Receive Sensitivity	< -31 dBm	< -31 dBm	< -31 dBm	< -33 dBm	< -22 dBm	< -22 dBm
Standard Optical Link Budget	> 11db	> 16dB	> 26dB	> 19dB	> 13dB	> 13dB
Optical Connector	LC	LC	LC	SC	LC	SC
Fiber Management	Integral fiber management with termination capacity for spare fiber cores					
Features	[Link loss forwarding, fault detection]			Link loss forwarding, fault detection		

[MEDIA CONVERTER]^{*3}**Ethernet over Coax**

Connectivity	Auto-optimizing for 75 Ω coaxial cable: 280m (920ft) full-rate over video-grade RG-59 (Up to 350m depending on cable quality) 350m (1150ft) full-rate over RG-6 500m (1640ft) full-rate over RG-11
Interface Data Rate	Auto-configuring for speed (10BASE-T or 100BASE-T) and duplex
Features	Retrofit existing analog CCTV installations to Ethernet-based systems, allow the connectivity of camera stations outside the permitted run length of 100Base-Tx Ethernet cabling

NOTE: *1 Dependent on certification and equipment fitted. *2 Dependent on cable tail option. *3 Exact interface option and media type must be specified at the time of order. Maximum transmission distance dependent on cable infrastructure quality and integrity. *4 Maximum permissible resolution, bitrate and framerate per additional stream will be reduced dependent on the configuration of the primary stream.

PART CODE STRUCTURE

C2 - A B C D - E - F G H J

(Example) C2 - 1 F T306 - - B 1 E X

A - CAMERA HOUSING SIZE
1 Size 1 camera housing

B - FIXED/PTZ
F Fixed

C - DAY/NIGHT CAMERA
N/A

D-THERMAL IMAGING MODULE
T306 Medium resolution, 35° HFOV
T318 Medium resolution, 13° HFOV
T618 High resolution, 25° HFOV
T636 High resolution, 12° HFOV

E - WIPER
N/A

J - SPECIAL
Standard build
X Special build

H - OUTPUT TRANSMISSION TYPE
C Coax
E Ethernet Base-T
S Singlemode fibre
M Multimode fibre

G - BASE/MOUNTING TYPE
3 Base type 3 (with PSU)
4 Base type 4 (without PSU)

F - TECHNOLOGY SERIES
B 3rd Gen, IP encoder